




Mineral Insulated Thermocouples - Type 12

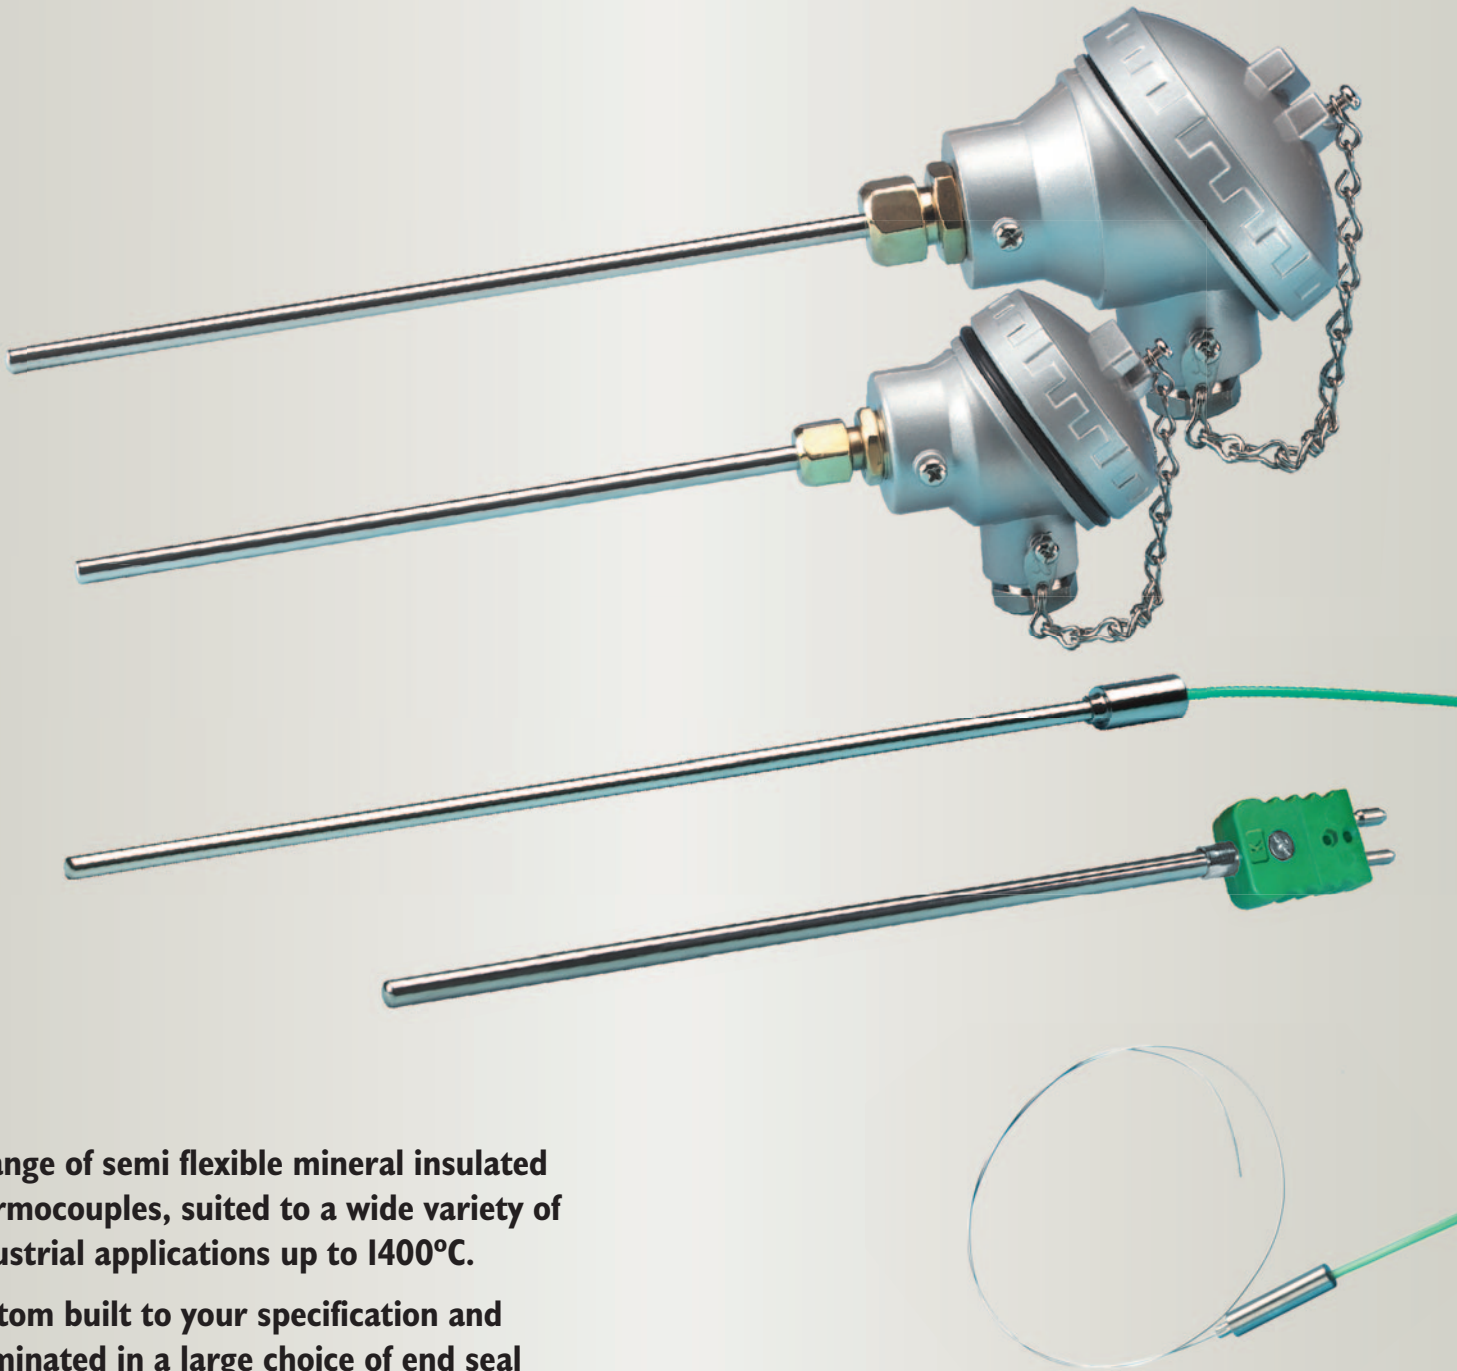


A range of semi flexible mineral insulated thermocouples, suited to a wide variety of industrial applications up to 1400°C.

Custom built to your specification and terminated in a large choice of end seal terminations and sheath materials from 0.25mm to 10.8mm diameter.

Type 12 Mineral Insulated Thermocouples

- High integrity construction suited to arduous operating conditions at temperatures from -200°C to +1400°C
- High accuracy and stability maintained throughout operating life
- Fast response and high insulation resistance
- UKAS calibration is available for our range of Mineral Insulated thermocouple assemblies
- The cable used to manufacture these assemblies conforms to BS EN 61515: 2016 / IEC 61515: 2016 and BS EN 60584 class 2, other tolerances are available on request
- Available in K, T, J, N, E, R, S, & B with sheath diameters from 0.25mm to 10.8mm and lengths from a few millimetres to 200 metres or more dependent on the sheath diameter selected
- Sheaths can generally be bent, twisted and flattened to suit particular installations without impairing performance
- Swaged end assemblies are available where fast response high strength sheaths or low displacement are a necessity

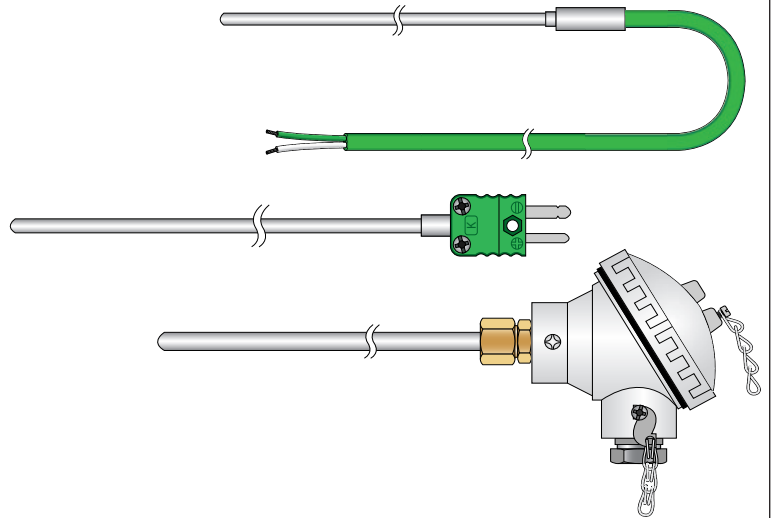

Typical Construction


The seamless metal sheath is available in a variety of materials with overall diameters from 0.25mm to 10.8mm. Sheath materials include: a range of stainless steels, Inconel 600*, Incoloy 800*, Chrome/Iron, Hastelloy X*, Nichrom D™ and other materials. Additionally these assemblies can be supplied with the sheaths bonded with a variety of fluoroplastic claddings to suit particular corrosive environments.

The complete assembly is a compact, self armoured, hermetically sealed, semi flexible probe providing the conductors with complete protection against oxidation and corrosion.


They are ideally suited for use in extreme environmental conditions of high vibration, high pressure/vacuum and over a wide operational temperature range of -200°C to +1400°C.

The length of the sheath of the finished assembly is to suit customer requirements (any length from a few millimetres to 200 metres or more dependent on the diameter).

A wide range of adjustable brass or stainless steel compression fittings screwed BSP or BSPT are available to suit the various sheath sizes for mounting Type 12 thermocouples. A selection of popular fittings is shown in section 7.

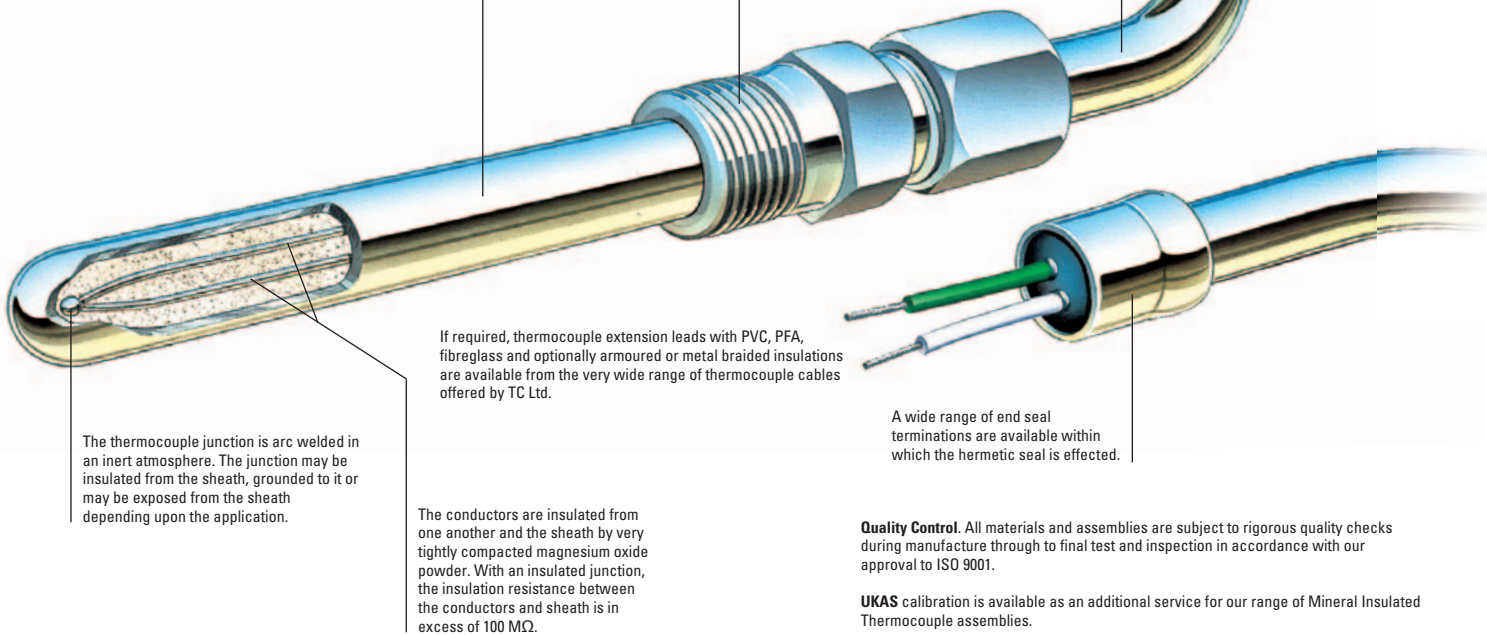

Swaged Reduced Tip



Swaged end reduced tip temperature sensors provide a unique fast response, high strength, low displacement, homogenous solution to many problematical temperature measurement applications. The technique combines the advantages of having a rugged large diameter metal sheath over most of its length with a low thermal mass, fast response, reduced diameter tip.

The length of the reduced tip (X) can be any length up to 900mm and virtually any diameter between 0.5mm and 5.2mm with the most popular sizes are shown in the table. Please contact us for other sizes.

Approximate Transition Lengths ('T' mm) for given Ø 'A' mm

ØB	Approximate Transition Lengths ('T' mm) for given Ø 'A' mm						
	6.0mm	4.5mm	3.0mm	2.0mm	1.5mm	1.0mm	0.5mm
6.0mm	-	-	-	-	-	-	-
4.5mm	6	-	-	-	-	-	-
3.0mm	12	6	-	-	-	-	-
2.0mm	16	10	4	-	-	-	-
1.5mm	18	12	6	2	-	-	-
1.0mm	20	14	8	4	2	-	-
0.5mm	-	-	-	6	4	2	-

Mineral Insulated Thermocouples **Type 12**




SECTION 1	Thermocouple Type	Temperature Range*	
		(continuous)	(short term)
K	Nickel Chromium vs Nickel Aluminium	0 to +1100°C	-180 to +1350°C
T	Copper vs Constantan	-185 to +300°C	-250 to +400°C
J	Iron vs Constantan	+20 to +700°C	-180 to +750°C
N	Nicrosil vs Nilil	0 to +1100°C	-270 to +1300°C
E	Nickel Chromium vs Constantan	0 to +800°C	-40 to +900°C
R	Platinum - 13% Rhodium vs Platinum	0 to +1600°C	-50 to +1700°C
S	Platinum - 10% Rhodium vs Platinum	0 to +1550°C	-50 to +1750°C
B	Platinum - 30% Rhodium vs Platinum - 6% Rhodium	+100 to +1600°C	+100 to +1820°C

*Depending on sheath material.

SECTION 3	Sheath Diameter (mm)	Sheath Diameter (inches)
	0.25mm	0.010"
	0.5mm	0.020"
	0.75mm	0.030"
	1.0mm	0.039"
	1.5mm	0.059"
	1.6mm (1/16")	0.063"
	2.0mm	0.079"
	3.0mm	0.118"
	3.2mm (1/8")	0.125"
	4.5mm	0.177"
	5.5mm*	0.216"
	6.0mm	0.236"
	6.35mm (1/4")	0.250"
	8.0mm	0.315"
	9.5mm	0.374"
	10.8mm*	0.425"

For types R, S, B, C and D a more limited range of sheath diameters is available.

* 5.5mm and 10.8mm diameter are thick wall, heavy duty constructions.

SECTION 4	Types of Sensing Junction	
2I		Insulated Hot junction insulated from sheath. Gives floating output with typical insulation resistance in excess of 100 megohms (or 2ID if Duplex element is required and 2IT if triplex element is required).
2G		Grounded Hot junction welded to sheath tip giving earthed output and faster response to temperature changes (or 2GD if Duplex element is required and 2GT if triplex element is required).
2X		Exposed Fastest response mainly for the measurement of air temperature in ducts. Restricted to a maximum operating temperature of 600°C (or 2XD if Duplex element is required and 2XT if Triplex element is required).

To suit particular attachment requirements thermocouples with measuring junction configurations 2I or 2G can be supplied with an extended tip or welding pad. (Contact the company for details of standard welding pad and extension tip configurations.)

Other special measuring junction configuration requirements can be met upon request.

SECTION 2	Sheath Materials		
	Sheath Specifications	Operational Properties	Max. Temp.
Standard	321 Grade 321 Stainless Steel 18/8/1 Ni/Cr/Titanium Stabilised To BS EN 10088, Werkstoff No : 1.4541	Very good corrosion resistance throughout the operating temperature range. Suited to a wide range of industrial applications. Enjoys high ductility.	800°C
	310 Grade 310 Stainless Steel 25/20 Nickel/Chromium To BS EN 10088, Werkstoff No : 1.4845	Good high temperature corrosion resistance and suitable for use in sulphur bearing atmospheres. 310 stainless steel has high oxidation resistance.	1100°C
	600 Inconel 600* Nickel/Chromium/Iron alloy To BS EN 10095, Werkstoff No : 2.4816	Used in severely corrosive atmospheres to elevated temperatures. Has good resistance to oxidation. Not recommended for use above 800°C when used with Type R, S or B thermocouples. Do not use in sulphur bearing atmospheres above 550°C.	1100°C

Specialized	316L Grade 316L Stainless Steel 18/8/1 Ni/Cr/Molybdenum Stabilised To BS EN 10088, Werkstoff No : 1.4404	Good high temperature corrosion resistance and suitable for use in sulphur bearing atmospheres. 316L stainless steel has high oxidation resistance.	800°C
	800 Incoloy 800* Iron/Nickel/Chromium alloy To BS EN 10095, Werkstoff No : 1.4876	Suitable for use in severely corrosive atmospheres to elevated temperatures. Enjoys a good resistance to oxidation and carburisation. Incoloy 800 is resistant to sulphur bearing atmospheres.	1100°C
	825 Incoloy 825* Iron/Nickel/Chromium alloy To BS EN 10204, Werkstoff No : 2.4858	Iron/Nickel/Chromium alloy with additions of molybdenum, copper, and titanium. Exceptional resistance to many corrosive environments. Resistant to chloride-ion stress-corrosion cracking.	1250°C
	446 AISI 446 Chrome/Iron ASTM TP446, AISI 446, To BS EN 10095, DIN X18CrN28, Werkstoff No : 1.4762	Suitable for use in severely corrosive atmospheres to elevated temperatures. Particularly suited for use in high concentration sulphur bearing atmospheres at high temperature. Sensor should be mounted vertically at temperatures above 700°C.	1150°C
	156 Hastelloy X* Nickel/Chromium/Iron/Molybdenum 51/22/18/9 Werkstoff No : 2.4665	For use in reducing, neutral and inert atmospheres. Has improved high temperature resistance to oxidation and attack by sulphur. At high temperature it has excellent tensile strength and develops a tightly adherent oxide film which does not spall.	1220°C
	276 Hastelloy C276* Nickel/Chromium/Iron/Molybdenum To ASTM B574, Werkstoff No : 2.4819	Excellent corrosion resistance to both oxidizing and reducing media and excellent resistance to localized corrosion attack. Excellent resistance to sulphur compounds and chloride ions.	1250°C
	114 Nicrotherm D™ Nickel/Chromium/Silicon/Molybdenum 73/22/1/4/3	For high temperature Type 'K' and almost all Type 'N' applications (optimum benefits with Type 'N'). Very good high temperature strength. Excellent in oxidising, carburising, reducing and vacuum atmospheres. Do not use in sulphur containing atmospheres.	1250°C
	160 Haynes HR160 Solid solution strengthened Nickel/Cobalt/Chromium-Silicon alloy ASTM B626, Werkstoff No : 2.4880	Resistant to various forms of high temperature corrosion attack. Excellent resistance to sulphur and chloride attack. Resistant to oxidation, hot corrosion, carburization, metal dusting, nitridation, and corrosion attack by low melting point compounds.	1200°C
	P10R Platinum 10% Rhodium	Primarily for use with thermocouple types R, S and B. Suitable for high temperature oxidizing atmospheres and inert atmospheres.	1400°C













Other sheath materials are available upon request.

* Trade Names

Typical Response Times			
Ømm	Time	Ømm	Time
0.25mm	0.015 seconds	3.2mm (1/8")	0.880 seconds
0.5mm	0.030 seconds	4.5mm	1.400 seconds
0.75mm	0.090 seconds	5.5mm*	4.000 seconds
1.0mm	0.150 seconds	6.0mm	3.000 seconds
1.5mm	0.300 seconds	6.35mm (1/4")	3.450 seconds
1.6mm (1/16")	0.320 seconds	8.0mm	5.500 seconds
2.0mm	0.400 seconds	9.5mm	6.750 seconds
3.0mm	0.800 seconds	10.8mm*	9.000 seconds





Response times for these assemblies are governed by and vary with the environmental conditions of particular applications. The information above refers to typical response times for assemblies with insulated Type 2I junctions being plunged into boiling water from air at 20°C. The figures refer to the times taken for the thermocouple junctions to achieve 63.2% of this instantaneous step change. For assemblies with grounded Type 2G junctions the response times are approximately 50% of those listed. * thick wall









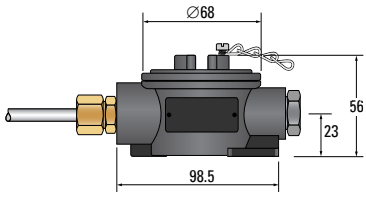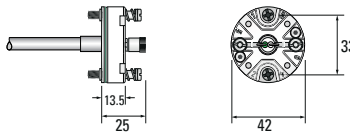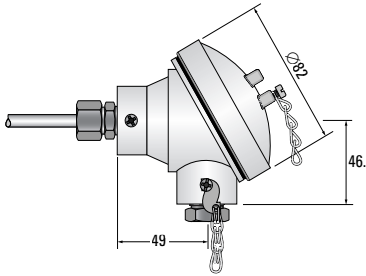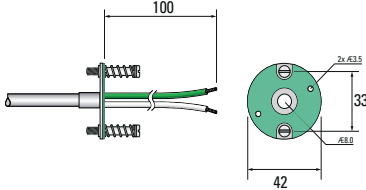

Type 12 Mineral Insulated Thermocouples

SECTION 5	Types of End Seal Configuration			
Diagram	Specification	Diagram	Specification	
3P1		Internal Seal with Bare Conductors for all sheath diameters 3P1 Maximum end seal temperature 135°C 3P1B Maximum end seal temperature 300°C 3P1C Maximum end seal temperature 650°C <i>Note: Only suitable as a temporary seal for applications adding an alternative seal later</i>	Micro Die Cast Alloy Head for diameters 3.0mm to 6.0mm Weatherproof die cast alloy, epoxy coated, screw down terminal head with tube entry and cable entry at a right angle to each other, with a ceramic terminal block. Suitable for simplex and duplex assemblies. Supplied with a 16mm x 1.5mm ISO metal pinch gland on the cable entry for cables from 4mm to 9.5mm diameter.	
3P2L		Crimp on Stainless Steel Pot Seal for sheath diameters up to 3.0mm 3P2L Pot Seal rated to 135°C 3P2LA Pot Seal rated to 235°C 3P2LB Pot Seal rated to 300°C <i>see section 6 if extension leads are required</i>	MAA	
3P2TRL	 <p><small>* It is unlikely that any benefit would be derived from specifying this type of pot seal with the standard 100mm tails.</small></p>	Stainless Steel Pot Seal with Anti Chafe Spring for sheath diameters up to 3.0mm 3P2TRL Pot Seal rated to 135°C 3P2TRLA Pot Seal rated to 235°C 3P2TRLB Pot Seal rated to 300°C <i>see section 6 if extension leads are required</i>	3P10	
3P4CL		Crimp on Stainless Steel Pot Seal for sheath diameters between 3.0mm & 8.0mm 3P4CL Pot Seal rated to 135°C 3P4CLA Pot Seal rated to 235°C 3P4CLB Pot Seal rated to 300°C <i>see section 6 if extension leads are required</i>	3P11	
3P4CTRL	 <p><small>* It is unlikely that any benefit would be derived from specifying this type of pot seal with the standard 100mm tails.</small></p>	Stainless Steel Pot Seal with Anti Chafe Spring for sheath diameters between 3.0mm & 8.0mm 3P4CTRL Pot Seal rated to 135°C 3P4CTRLA Pot Seal rated to 235°C 3P4CTRLB Pot Seal rated to 300°C <i>see section 6 if extension leads are required</i>	3P11	
3P3L	 <p><small>Lock nuts are available in stainless steel to suit the 3P3L series and should be ordered separately as LND05.</small></p>	8mm ISO x 1mm Threaded Stainless Steel Pot Seal for sheath diameters up to 3.0mm 3P3L Pot Seal rated to 135°C 3P3LA Pot Seal rated to 235°C 3P3LB Pot Seal rated to 300°C <i>see section 6 if extension leads are required</i>	3P11	
3P5		16mm ISO x 1.5mm Brass Compression Gland Pot Seal for sheath diameters 1.0mm to 8.0mm 3P5 Pot Seal rated to 135°C 3P5A Pot Seal rated to 235°C <i>see section 6 if extension leads are required</i>	3P12	
3P5S		16mm ISO x 1.5mm St. Steel Compression Gland Pot Seal for sheath diameters 1.0mm to 8.0mm 3P5S Pot Seal rated to 135°C 3P5SA Pot Seal rated to 235°C 3P5SB Pot Seal rated to 300°C <i>see section 6 if extension leads are required</i>	3P12	
3P6	 <p><small>3P6 illustrated</small></p>	Standard 2-pin (round) Plug for sheath diameters between 1.0mm & 8.0mm 3P6 Plug rated to 220°C 3P6H Plug rated to 300°C 3P6UH Plug rated to 425°C 3P6C Plug rated to 600°C	3P16	
3P6M	 <p><small>3P6M illustrated</small></p>	Miniature 2-pin (flat) Plug for sheath diameters between 0.25mm & 3.2mm 3P6M Plug rated to 220°C 3P6MH Plug rated to 300°C 3P6MUH Plug rated to 425°C 3P6MC Plug rated to 600°C	3P16	
3P7	 <p><small>3P7 illustrated</small></p>	Standard 2-pin (round) Socket for sheath diameters between 1.0mm & 8.0mm 3P7 Socket rated to 220°C 3P7H Socket rated to 300°C 3P7UH Socket rated to 425°C 3P7C Socket rated to 600°C	3P17	
3P7M	 <p><small>3P7M illustrated</small></p>	Miniature 2-pin (flat) Socket for sheath diameters between 0.25mm & 3.2mm 3P7M Socket rated to 220°C 3P7MH Socket rated to 300°C 3P7MUH Socket rated to 425°C 3P7MC Socket rated to 600°C	3P17	

continued

Mineral Insulated Thermocouples **Type 12**

SECTION 5		Types of End Seal Configuration (continued)			
	Diagram	Specification		Diagram	Specification
3P18		<p>Alloy Straight Through Head for diameters 4.5mm to 10.8mm</p> <p>Die cast alloy straight through terminal head with a bakelite terminal block. Suitable for simplex or duplex assemblies. Supplied with a 20mm x 1.5mm pitch ISO pinch gland on the cable entry for cables from 6mm to 14mm diameter. <i>*If supported at fixing holes, suitable for diameters of 1mm and above.</i></p>	3P20		<p>Spring Loaded Terminal Block for diameters 3.0mm to 8.0mm</p> <p>Spring loaded insert assemblies. The end seal is incorporated into a terminal block suitable for mounting into a 3P11, 3P12, 3P17 or any other standard terminal head. Suitable for use with 3mm, 4.5mm, 6mm and 8mm sheaths only. The ceramic terminal block has 2 x 33mm spaced mounting holes. Suitable for simplex, duplex and triplex assemblies.</p>
3P19		<p>Stainless Steel Head for diameters 4.5mm to 10.8mm</p> <p>Weatherproof stainless steel, screw top terminal head with the tube entry and cable entry at a right angle to each other, with a ceramic terminal block. Suitable for simplex, duplex and triplex assemblies. Supplied with a 20mm x 1.5mm ISO metal pinch gland on cable entry for cables from 6mm to 14mm diameter.</p>	3P20/BP		<p>DIN Mounting Plate for diameters 3.0mm to 8.0mm</p> <p>Spring loaded mounting plate assemblies. The end seal is incorporated into a mounting plate suitable for mounting into a 3P11, 3P12, 3P17 or any other standard terminal head. Suitable for use with 3mm, 4.5mm, 6mm and 8mm sheaths only. 100mm tails allows for connection to a head mounting transmitter or other suitable terminal block.</p>


SECTION 6		Extension Cables			
	Diagram	Specification		Diagram	Specification
A30		<p>HR PVC Flat Twin (105°C) One pair of 7/0.2mm stranded conductors HR PVC insulated. Pair laid flat and HR PVC sheathed overall.</p>	B80		<p>PFA Twisted Pair with Screen (250°C) One pair of stranded conductors PFA insulated. Pair twisted, screened with Mylar® aluminium tape and drain wire. PFA sheathed overall.</p>
A27		<p>HR PVC Twisted Pair with Screen (105°C) One pair of 7/0.2mm stranded conductors HR PVC insulated. Pair twisted, screened with Mylar® aluminium tape and drain wire. HR PVC sheathed overall.</p>	B40		<p>PFA Twisted with Ni Plated Cu Braid (250°C) One pair of 7/0.2mm stranded conductors PFA insulated. Pair twisted with overall nickel plated copper braid and PFA sheathed.</p>
B50		<p>PFA Flat Twin (250°C) One pair of 7/0.2mm stranded conductors PFA insulated. Pair laid flat. PFA sheathed overall.</p>	SR30		<p>Silicone Rubber, Twisted Pair (200°C) One pair of 7/0.2mm stranded conductors PFA insulated. Silicone rubber sheathed.</p>
BM 0702		<p>PFA 2-pair for duplex sensors (250°C) Two pairs of 7/0.2mm dia stranded conductors PFA insulated. Pairs twisted and bunched and screened with Mylar® aluminium tape with a drainwire. PFA sheathed.</p>	C40		<p>Fibreglass Flat Twin (480°C) One pair of 7/0.2mm stranded conductors double glass fibre lapped, braided and varnished. Pair laid flat, glass fibre braided and varnished.</p>
BM 0702/SSB		<p>PFA 2-pair for duplex sensors with Stainless Steel braid (250°C) Two pairs of 7/0.2mm stranded conductors PFA insulated. Pairs twisted and bunched and screened with Mylar® aluminium tape with a drainwire. PFA sheathed with overall stainless steel braid.</p>	C60		<p>Fibreglass Flat Twin with Steel Braid (480°C) One pair of 7/0.2mm stranded conductors double glass fibre lapped, braided and varnished. Pair laid flat, glass fibre braided and varnished. Stainless steel wire braided overall.</p>

If no cable is required, leave this section of the order code blank and the sensor will be supplied with PFA tails. Other cables are available on request.

'HR' = Heat Resistant

SECTION 7		Optional Stainless Steel Compression Fittings							
Dia.	1/8" BSPT	1/4" BSPT	1/2" BSPT	Dia.	1/8" BSPT	1/4" BSPT	1/2" BSPT		
0.5mm	SFS18T05	-	-	3.0mm	SFS18T30	SFS14T30	SFS12T30		
0.75mm	SFS18T75	-	-	4.5mm	SFS18T45	SFS14T45	SFS12T45		
1.0mm	SFS18T10	SFS14T10	SFS12T10	6.0mm	SFS18T60	SFS14T60	SFS12T60		
1.5mm	SFS18T15	SFS14T15	SFS12T15	8.0mm	-	SFS14T80	SFS12T80		

Other sizes and materials are available, please contact us for details.

SECTION 8		Optional 4 to 20mA Head Mounted Transmitter (please specify range in °C)	
TXLTC		Suitable for use with the following terminal heads: 3P11, 3P12, 3P17, 3P18 and 3P19 and other standard heads with 33mm fixing.	Typical Order Code: TXLTC (0/200°C)
	Fully Linearised		

Order Code - Example												
Style No.	Thermocouple Type (see section 1)	Sheath Length	Sheath Material (see section 2)	Sheath Diameter (see section 3)	Sensing Junction (see section 4)	End Seal Termination (see section 5)	Extension Cable (see section 6)	Optional Compression Fitting (see section 7)	Reduced Tip Dimensions (if required)	Optional Transmitter (see section 8)		
12	- K -	450	- 310 -	6.0	- 2I -	3P4CL	- 2 MTRS A30KX -	SFS18T30	-	REDUCED TIP: 3.0mm x 50mm LONG	-	



PO Box 130

Uxbridge

UB8 2YS

United Kingdom

Tel: 01895 252222

International: +44 1895 252222

Email: info@tc.co.uk

Web: www.tc.co.uk

© 2019 TC Ltd.
Issue Number: 0421

TC Ltd for Temperature Sensing, Measurement and Control